www.klcmakina.com

KALAYCIOĞLU
KLC MAKİNA

Contact Us
+90 (312) 394 74 25
+90 532 203 77 25

e-Mail Support
info@klcmakina.com
kalaycioglu klcmakina@hotmail.com




TÜRKMALI
MADE IN TURKEY

ÜRÜNLERİMİZ
OUR PRODUCTS



Çeneli Kırıcı
Jaw Crusher

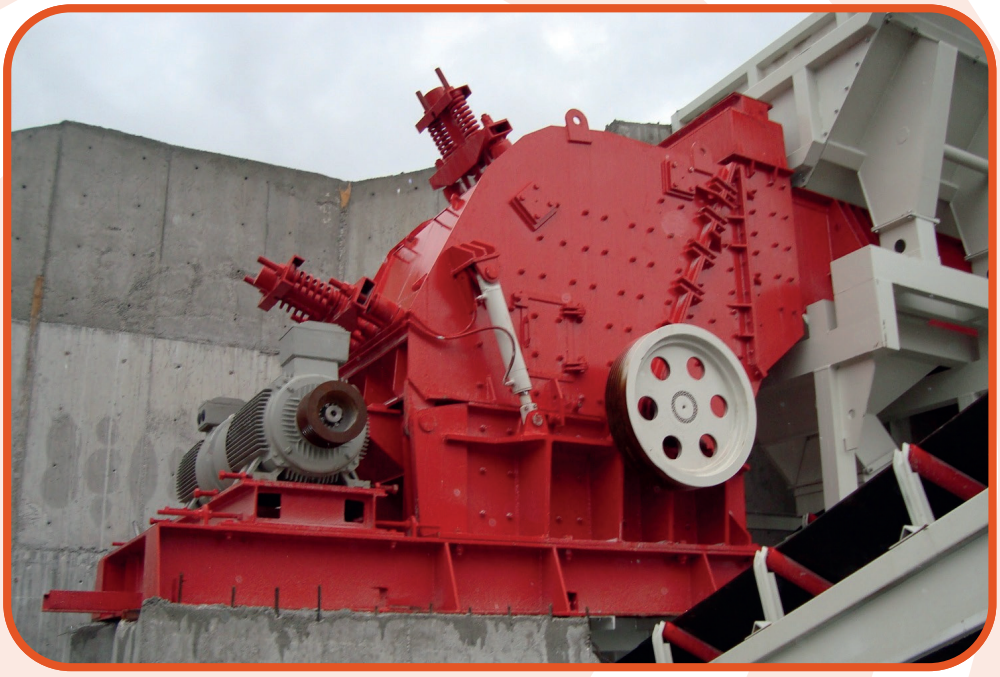

Primer Darbeli Kırıcı
Primary Impact Crusher

ÜRÜNLERİMİZ
OUR PRODUCTS





Dik Milli Kırıcı
Vertical Shaft Impact Crusher



Sekonder Darbeli Kırıcı
Secondary Impact Crusher

ÜRÜNLERİMİZ
OUR PRODUCTS

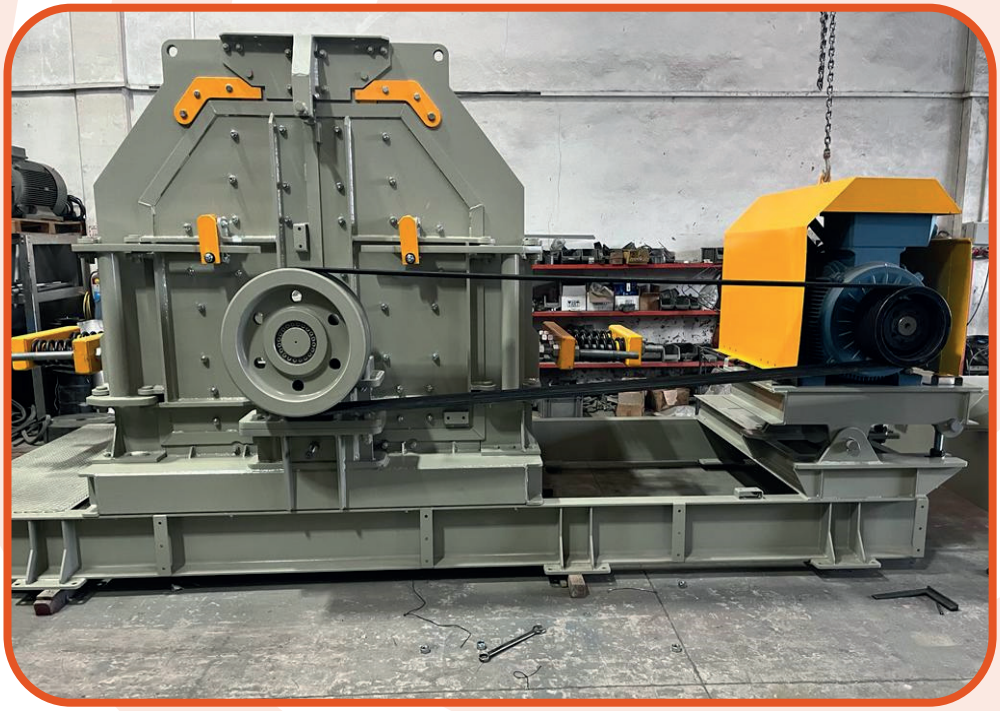

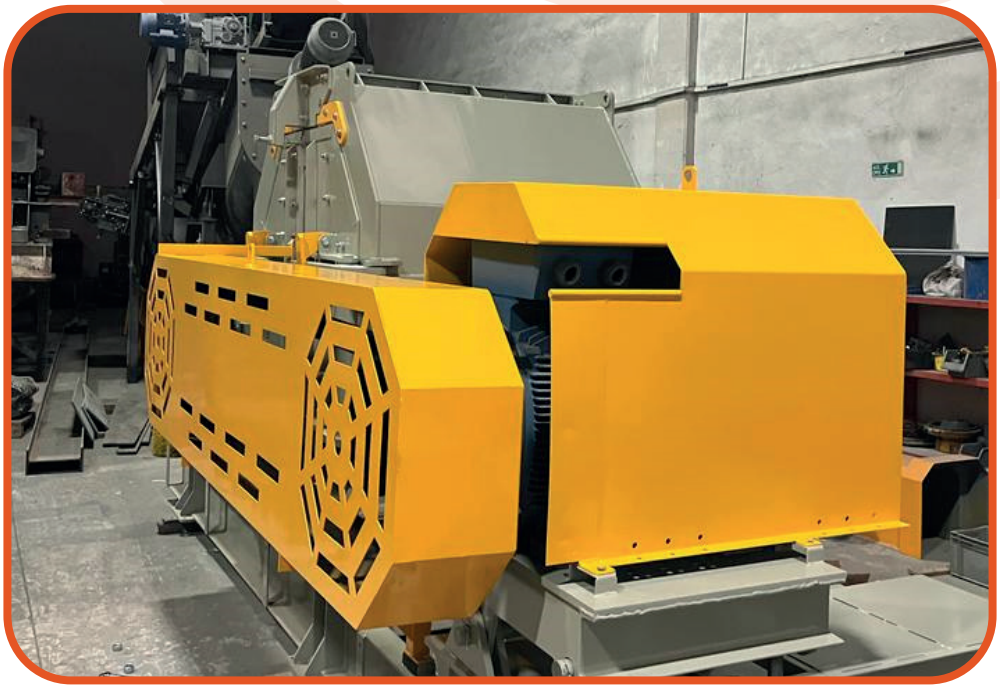

Tersiyer Kırıcı
Tertiary Impact Crusher

ÜRÜNLERİMİZ
OUR PRODUCTS




Titreşimli Elek
Vibrating Screens



Konveyör Bantlar
Conveyors

ÜRÜNLERİMİZ
OUR PRODUCTS

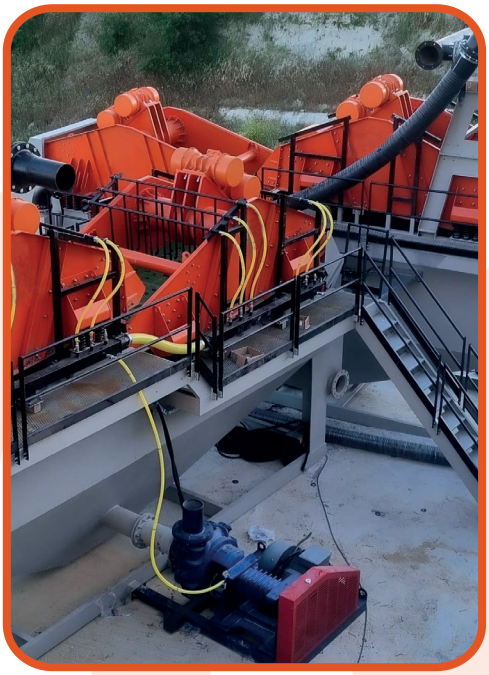



Susuzlandırma Eleği
Dewatering Screens



Tromel Elek
Trommel Screens

ÜRÜNLERİMİZ
OUR PRODUCTS





Helezon Yıkayıcı
Sand Washer



Aglomerator Topraklama Tamburu
Agglomerator Drum

ÜRÜNLERİMİZ
OUR PRODUCTS



Yıkama Tamburu
Washing Drum



Mekanik Plent Karıştırıcı
Multiple Bunkers

ÜRÜNLERİMİZ
OUR PRODUCTS



Mobil Kırma ve Eleme Ünitesi
Mobile Crushing and Screening Units

ÜRÜNLERİMİZ
OUR PRODUCTS



Mobil Eleme Ünitesi
Mobile Screening Units

ÜRÜNLERİMİZ
OUR PRODUCTS



Grizzly Feeder&Bunker
Bunker ve Izgaralı Besleyici

ÇENELİ KIRICI
JAW CRUSHERS

Çeneli kırıcılar, malzemeye uygulanan yüksek basınç kuvveti ile büyük abbresif taşları kırar. Mekanik basınç, kırıcının iki çenesi kullanılarak uygulanır; biri sabitken diğeri eliptik bir hareket yapar. Birincil dışında ikincil seçenekleri de bulunan çeneli kırıcılar, her sertlikteki malzemeyi kırabilme özelliği ile en çok tercih edilen kırıcılar arasındadır. Düşük işletme maliyetleri ve kolay bakım olanakları tercih nedenini artıran en önemli özellikler arasında yer alıyor.

Jaw crushers break large abbresive stones with the high-pressure force applied to the material. Mechanical pressure is applied using the two jaws of the breaker; while one is stationary, the other is making an elliptical motion. Jaw crushers, which have secondary options besides the primary, are among the most preferred crushers with their ability to crush materials of any hardness. Low operating costs and easy maintenance opportunities are among the most important features that increase the reason for preference.

Jaw Crusher		Primary Jaw Crusher			Secondary Jaw Crusher	
Ouverture d'alimentation		*Concasseur à mâchoires primaire*			*Concasseur à mâchoires secondaire*	
TYPE / TYPE		K03	K07	K11	K04	K12
Feeding Opening / *Feeding Opening*	(mm)	900 x 650	1100 x 850	1300 x 1100	900 x 200	1100 x 350
Discharge Opening / *Ouverture de décharge*	(mm)	50 - 150	100 - 300	125 - 300	20 - 80	25 - 75
Capacity / *Capacité*	(t/h)	50-200	100 - 300	260 - 450	10 - 60	40 - 125
Drive / *Entraînement*	(kW)	75	132	160	30	55
Weight / Poids	(kg)	12100	34000	42800	5600	9300
Dimension A / *Cote A*	(mm)	860	1000	1200	860	1000
Dimension B / *Cote B*	(mm)	2050	2800	2950	1850	2600
Dimension C / *Cote C*	(mm)	2200	2900	3500	1500	2100
Dimension D / *Cote D*	(mm)	2000	265	3100	1400	1900



PRIMARY IMPACT CRUSHERS


PRIMER DARBELİ KIRICI

Primer Darbeli Kırıcılar, kireç tonu ocakları gibi yumuşak malzemelerin üretildiği işletmelerde yüksek performansı nedeniyle tercih edilen kırıcılardır. Kırma prensibi sayesinde küçültme oranı çeneli kırıcılara göre daha yüksektir.

Primary Impact Crushers are the crushers preferred because of their high performance in enterprises where soft materials such as limes tone quarries are produced. Thanks to the crushing principle, the reduction ratio is higher than that of jaw crushers.

TYPE / *TYPE*		KTP01	KTP02	KTP03
Rotor Diameter / *Diamètre du rotor*	(mm)	1400	1400	1600
Rotor Width / *Largeur du rotor*	(mm)	1500	1250	2000
Capacity / *Capacité*	(t/h)	250-500	200-300	400-1000
Drive / *Conduire*	(kW)	250	200	2x250
Weight / *Poids*	(kg)	28500	22000	53000
Dimension A / *Cote A*	(mm)	3700	3700	5200
Dimension B / *Cote B*	(mm)	3850	3850	5000
Dimension C / *Cote C*	(mm)	2900	2650	3400
Dimension D / *Cote D*	(mm)	1500	1500	2000
Dimension E / *Cote E*	(mm)	17400	1450	2200



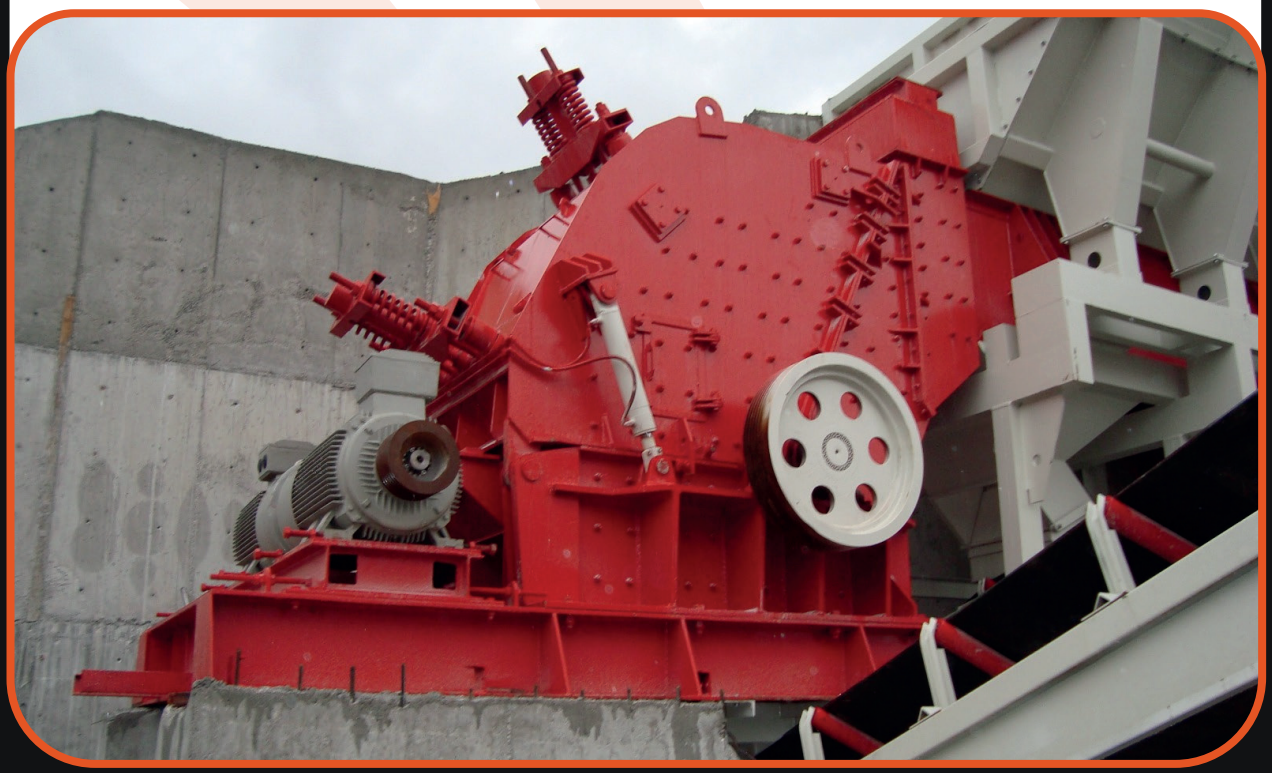

DİK MİLLİ KIRICI
VERTICAL SHAFT IMPACT CRUSHERS

Dik milli darbeli kırıcılar diğer darbeli kırıcıların sahip olmadığı taşı taşa kırdırma prensibi ile benzersiz bir tasarıma sahiptir. Bu çalışma prensibi sayesinde hem sarf malzeme maliyetini düşürmekte hem de yüksek kaliteli agrega üretimi için kübik malzeme sunmaktadır. Dik milli darbeli kırıcılar genellikle kırma işleminin son aşamasında taş ocaklarında yassı malzemeye şekil vermek ve madencilikte malzemeleri öğütmeye hazırlamak için kullanılır. Düşük işletme maliyeti nedeniyle en verimli kırıcılardan biri olan KLC dikey milli darbeli kırıcılarımız, nemi ve yapışkanlığı tolere eder ve ayrıca malzeme üzerinde kurutucu bir etkiye sahiptir. Bu da kuru ürün gereken durumlarda kurutma maliyetlerini düşürmektedir.

Vertical shaft impact crushers (VSI) have a unique design with the principle of crushing stone to stone, which other impact crushers do not have. Thanks to this working principle, it both reduces the cost of consumables and offers cubic materials for high quality aggregate production. Vertical shaft impact crushers are often used in the final stage of crushing to shape flat material in quarries and to prepare materials for grinding in mining. Our KLC vertical shaft impact crushers, which are one of the most efficient crushers due to their low operating cost, tolerate moisture and stickiness, and also have a drying effect on the material. This reduces drying costs in cases where dry product is required.

TYPE *TYPE*		Diameter *Diamètre*	Drive *Drive*	Capacity Capacité	*Feed Material* *Capacité de matériau d'alimentation*
VSI 900 CR	(mm)	900	2x200	250 - 350	5 - 40
VSI 800 CR	(mm)	800	1x250	150 - 250	5 - 35
VSI 700 CR	(mm)	700	132	80 - 150	5 - 32
VSI 1000 OR	(mm)	1000	2x250	350 - 400	5 - 100



SEKONDER DARBELİ KIRICI
SECONDARY IMPACT CRUSHERS

Sekonder darbeli kırıcılar, kireçtaşı ve dolomit gibi orta ve yumuşak sertlikteki malzemelerde yüksek performansları ve inceltme oranları ile en ekonomik seçenekler arasında yer almaktadır. KLC darbeli kırıcıların öğütücü modeli, asfalt geri dönüşümü için rekabetçi bir tasarım sağlar.

Secondary impact crushers are among the most economical choices with their high performance and thinning rates in materials with medium and soft hardness such as limestone and dolomite. The grinder model of the KLC impact crushers provides a competitive design for asphalt recycling.

TYPE / *TYPE*		KTS01	KTS02	KTS03
Rotor Diameter / *Diamètre du rotor*	(mm)	1120	1120	1120
Rotor Width / *Rotor Width*	(mm)	1000	1250	1500
Capacity / *Capacité*	(t/h)	120 - 180	150 - 250	200 - 350
Drive / *Drive*	(kW)	160	200	250 - 315
Weight / *Poids*	(kg)	16500	18500	21000
Dimension A / *Cote A*	(mm)	3150	3150	3150
Dimension B / *Cote B*	(mm)	1150	1400	1650
Dimension C / *Cote C*	(mm)	3450	3450	3450
Dimension D / *Cote D*	(mm)	2140	2390	2640




TERSİYER KIRICI
TERTIARY IMPACT CRUSHERS

KLC tersiyer darbeli kırıcılar, yumuşak ve orta sertlikteki malzemelerin yakın ve düzenli kübik şekillerde kırılması için tasarlanmıştır. Bu kırıcılar, asfalt ve beton üretimi için son derece uygun olan ince agregalar elde etmek için mükemmel bir çözümdür. Ayarlanabilir ve değiştirilebilir sarkaçlar, her iki yönde de çalışabilen dayanıklı bir rotor ile yüzde 50'ye kadar ince ürün kırabilir, bu da kırıcının işletme ve stok maliyetlerini azaltır.

KLC tertiary impact crushers are designed for crushing soft and medium hard materials in close and regular cubic shapes. These crushers are the perfect solution to obtain fine aggregates that are highly suitable for asphalt and concrete production. Adjustable and replaceable pendulums can break up to 50 percent fine product with a durable rotor that can work in both directions, which reduces the operating and inventory costs of the crusher.

TYPE / *TYPE*		KTK130	KTK150
Rotor Diameter / *Diamètre du roto*/RotorÇapı	(mm)	1100	1100
Rotor Width / *Largeur du rotor*/Palet Uzunluğu	(mm)	1300	1500
Capacity / *Capacité*/Kapasitesi	(t/h)	120-180	150-220
Drive / *Entraînement*/Motor Gücü	(kW)	160	250
Weight / *Poids*/Ağırlığı	(kg)	15800	21500
Dimension A / *Cote A*	(mm)	1100	1500
Dimension B / *Cote B*	(mm)	920	1330
Dimension C / *Cote C*	(mm)	980	980
Dimension D / *Cote D*	(mm)	4320	4320
Dimension E / *Cote E*	(mm)	38520	3850
Dimension E / *Cote F*	(mm)	1830	2240
Dimension E / *Cote G*	(mm)	1000	1000



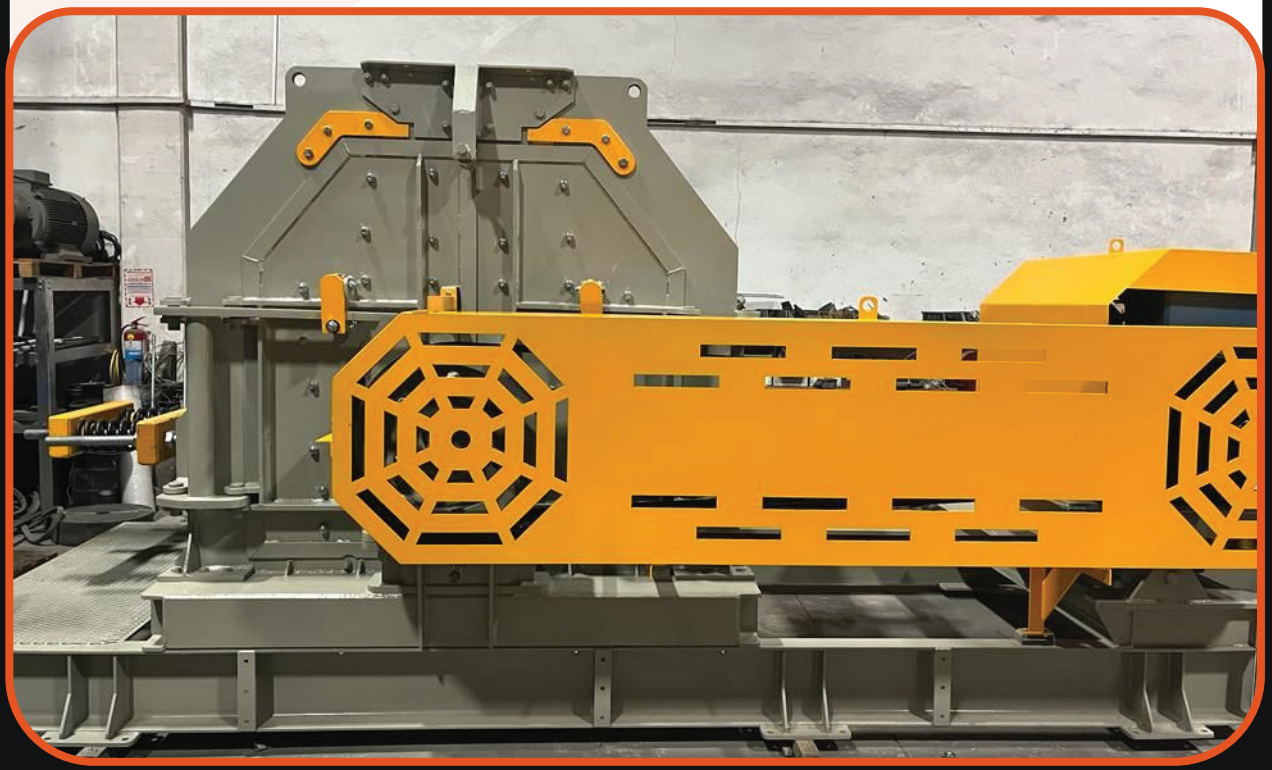

IZGARALI BESLEYİCİ BUNKER ve WOBBLER

WOBBLER & BUNKER

KLC grizzly besleyiciler en zorlu koşullarda başarıyla çalışmak üzere tasarlanmıştır. Yüksek aşınma direnci, ısıl işlem görmüş tahrik konsolu ve yüksek kaliteli vibratörleri ile maksimum verimlilik, dengeli besleme ve minimum arıza ile etkin ve uzun süreli çalışma sağlar.

KLC grizzly feeders are designed to work successfully in the toughest conditions. With its high wear resistance, heat treated drive console and high quality vibrators, it provides maximum efficiency, balanced feeding and effective and long-term operation with minimum break down.

TYPE / *TYPE*		G11	G10	G09	G13
Feeder Wiidth / *Largeur du chargeur*	(mm)	600	950	1200	1350
Feeder Lenght / *Longueur du chargeur*	(mm)	3000	4000	5000	5000
Capacity / *Capacité*	(t/h)	45-100	100-200	120-300	300-600
Hooper's Volume / *Le volume de Hooper*	(m^3)	12	25	35	45
Drive / *Conduire*	(kW)	2x2	2x4	2x7,5	2x9,8
Weight / *Poids*	(kg)	9500	13000	17000	18000
Dimension A / *Cote A*	(mm)	4000	4500	4600	4600
Dimension B / *Cote B*	(mm)	4800	5800	6800	6800
Dimension C / *Cote C*	(mm)	3000	3600	3820	3970





TİTREŞİMLİ ELEK
VIBRATING SCREEEN

Eleme işlemi, kırma işleminin kendisi kadar önemlidir. Elekler taş ocaklarının kalbidir. Elekler hem kırma işleminin çeşitli aşamalarında hem de nihai ürünün sınıflandırılmasında kullanılır. Farklı malzeme tipleri ve boyutları için kaynaksız çerçeve ve ayarlanabilir titreşim özelliği ile tasarlanan Kestaşmak elekleri hem kaliteli hem de verimli eleme sağlar. 2 m2'den 16 m2'ye kadar olan eleklerimiz, çeşitli ebatlarda dört kata kadar hasır, delikli sac, poliüretan ve çelik hasır dahil olmak üzere farklı tel örgü tipleri ile donatılabilmekte ve yıkama seçeneği ile de geniş bir uygulama yelpazesinin ihtiyaçlarını karşılamaktadır.

The sieving process is as important as the crushing process itself. Sieves are the heart of the quarries. Sieves are used both in the various stages of the crushing process and in the classification of the final product. Kestasmak screens designed with a weldless frame and adjustable vibration feature for different material types and sizes provide both high quality and efficient sieving. Our screens from 2 m2 to 16 m2 can be equipped with different types of wire mesh, including up to four layers of mesh, perforated sheet metal, polyurethane and steel mesh in various sizes. it also meets the needs of a wide range of applications with its washing option.

TYPE / TYPE		KTE1030	KTE1230	KTE1240	KTE1650	KTE2050	KTE2060	KTE2070	KTE2460
With (A) / *With (A)*	(mm)	1000	1200	1200	1600	2000	2000	2000	2400
Lenght (B) / *Lenght (B)*	(mm)	3000	3000	4000	5000	5000	6000	7000	6000
Height (C) / *Height (C)*	(mm)	2570	3850	4020	5600	560	7000	7300	7000
Drive / *Drive*	(kW)	5,5	7,5	7,5	11	18,5	22	30	30
Weight / *Weight*	(kg)	3300	4250	5700	8250	12600	14800	15900	16100



SUSUZLANDIRMA ELEĞİ ve HİDROSİKLON

DEWATERING SCREEN WASHERS & SIKLON

KLC tek ve çift vidalı yıkama sistemleri genellikle yıkanmış malzemelerin ve su ile karışmış malzemelerin sudan arındırılması için kullanılır. Hazne su ile doldurulduğunda hafif partiküller yüzerken kalın malzemeler toplanır, kum ise dibe çökerek birikir. Helezonlar biriken malzemeyi çıkışa doğru iter ve suyu tahliye eder. KLC yıkama helezonları servis ömrünü uzatmak için standart olarak poliüretan astarlı aşınma parçaları ile donatılmıştır.

KLC single and double screw washing systems are generally used to purify washed materials and materials mixed with water from water. When the reservoir is filled with water, light particles float while thick materials are collected, while sand sinks and accumulates at the bottom. Spirals push the accumulated material up to the outlet and discharge the water. in order to extend the service life, KLC washing augers are equipped with polyurethane lined wear parts as standard.

TYPE / *TYPE*		YH16	YH18	YH26	YH28
Screw Diameter / *Screw Diameter*	(mm)	600	800	600	800
Lenght / *Lenght*	(mm)	6000	8000	6000	8000
Capacity / *Capacity*	(m^3/h)	25 - 35	35 - 60	45 - 65	70 - 80
Weight / *Weight*	(kg)	2500	4600	5250	7400
Dimension A / *Dimension A*	(mm)	1500	1800	1500	1800
Dimension B / *Dimension B*	(mm)	6300	8400	6300	8400
Dimension C / *Dimension C*	(mm)	1450	2000	1450	2000
Dimension D / *Dimension D*	(mm)	1500	1700	2200	2800
Dimension D / *Dimension E*	(mm)	800	1000	1400	2000



MADEN YIKAMA TAMBURU

WASHING DRUMS

Kategori : Aşınma Parçaları & Diğerleri

Maden yıkama tamburu iki işlevden oluşur: biri kili yıkamak ve çıkarmak içindir; diğeri ise farklı boyutlardaki cevherleri elemek içindir. Tamburu desteklemek için 6 adet taşıyıcı lastik bulunmaktadır. Silindir kauçuk astarlarla kaplanmıştır. Eleme eleği paslanmaz çeliktir ve farklı boyuttaki cevherleri ayıracaktır, elek ağından daha büyük cevher boşaltma hunisine gidecek ve küçük cevherler elekten dışarı akacaktır.

Category : Wear Parts & Others

The ore washing drum is consisted of two function: one is for washing and removing the clay; another is for sieving different sizes ores. There are 6 carrier tires to support the drum. The cylinder is coated with rubber liners. The sieving screen is stainless steel and will separate different size ores, the ore bigger than screen mesh will go to the **discharge hopper, and the small ores will be flow out from screen sieve.**

Model	Drum Size (m)	Screen size (mm)	Feeding size (mm)	Water pressure (Mpa)	Every ton of ore water required (M3/t)	Capacity (T/h)	Rotation speed (r/min)	Power (Kw)	Weight (Kg)
KLC 1030	Φ1.0×3.0	≥5	≤100	0.4~0.5	1.5~4	30~50	25~28	15	4800
KLC 1230	Φ1.2×3.0	≥5	≤100	0.4~0.5	1.5~4	50~70	23~25	18.5	5800
KLC 1545	Φ1.5×4.5	≥5	≤150	0.4~0.5	1.5~4	70~120	18~22	30	6900
KLC 1560	Φ1.5×6.0	≥5	≤150	0.4~0.5	1.5~4	80~130	18~22	37	8300
KLC 1845	Φ1.8×4.5	≥5	≤170	0.4~0.5	1.5~4	90~130	20~21	45	11800
KLC 1860	Φ1.8×6.0	≥5	≤170	0.4~0.5	1.5~4	100~140	20~21	45	12800
KLC 2060	Φ2.0×6.0	≥5	≤210	0.4~0.5	1.5~4	120~160	19~20	55	14800
KLC 2265	Φ2.2×6.5	≥5	≤230	0.4~0.5	1.5~4	160~180	19~20	55	16500



AGLOMERATÖR TOPRAKLAMA TAMBURU

AGGLOMERATOR DRUM

Aglomeratör tamburu, döner tambur aglomeratörü, döner granülatör olarak da bilinir. Esas olarak yığın liçi için altın madeni ince aglomerasyonu için uygulanır. Gümüş, bakır gibi diğer cevher tozlarının aglomerasyonu için de kullanılabilir. Diğer peletleme makinelerine göre daha yüksek kapasiteye sahiptir.

Agglomeration drum is also known as Rotary drum agglomerator, rotary granulator. It is mainly applied for the gold ore fines agglomeration for heap leaching. It could also for the agglomeration of other ore fines, like silver, copper. It is featured with high capacity than **other kind of pelletizing machine.**

KLC 3000	1.5~3	KLC 3000	16000	12	155	<400	17000mm*5300mm*4600mm
KLC 3200	1.5~2.5	KLC 3200	14000	11	155	<550	15000mm*5600mm*4700mm
KLC 3200	1.5~2.5	KLC 3200	17000	11	175	<630	18000mm*5600mm*4700mm
KLC 3600	1.5~2.5	KLC 3600	16000	10.5	210	<750	17000mm*6500mm*5500mm
KLC 3600	1.5~2.5	KLC 3600	20000	10.5	255	<820	22000mm*6500mm*5500mm
KLC 3800	1.5~2.5	KLC 3800	17000	10	315	<850	18000mm*7000mm*6000mm
KLC 3800	1.5~2.5	KLC 3800	21000	10	355	<970	22000mm*7000mm*6000mm
KLC 4000	1.5~2	KLC 4000	17000	9.2	355	<820	18000mm*7500mm*6500mm
KLC 4000	1.5~2	KLC 4000	22000	9.2	400	<1100	23000mm*7500mm*6500mm
KLC 4200	1.5~2	KLC 4200	19000	8	420	<1100	20000mm*8000mm*6800mm
KLC 4200	1.5~2	KLC 4200	26000	8	475	<1200	27000mm*8000mm*6800mm



TROMEL ELEK
TROMMEL SCREENS

Trommel elekler, atıkları önceden belirlenmiş boyutlara göre ayıran makinelerdir. Bu işlem, trommel eleğin içinde bulunan ve üzerinde belirli çapta delikler bulunan tambur yardımıyla gerçekleşir. Tamburun saclarının değiştirilebilmesi, makinenin farklı boyutlardaki atıkları ayırabilmesini sağlar. İstenilen kapasite ve talebe göre trommel elek imalatı yapmaktayız.

Trommel screens are the machines which separates the waste according to predetermined sizes. This process occurs with help of the drum inside of the trommel screen which has holes with certain diameter. Availability of changing sheet metals of the drum allows the machine to sort wastes in different dimensions. We manufacture **trommel screen according to required capacity and demands.**

	UNIT	DTS 20	DTS 25	DTS 30
MOTOR	kW	11+11	15 + 15	18,5 + 18,5
ROTARY SCREEN LENGTH	m	6	12	12
TOTAL LENGTH	m	7,5	13,5	13,5
ROTARY SCREEN DIAMETER	mm	Ø 2000	Ø 2500	Ø 2500
SCREEN SIZE HOLE	mm	Ø 20 – Ø 350	Ø 20 – Ø 350	20 – Ø 350
CAPACITY	t/h	7,0 – 10,0	15,0 – 20,0	25,0 – 45,0
ROTATION SPEED	dev/dk-rpm	0,0 – 14,0	0,0 – 14,0	0,0 – 14,0
ROTATION SPEED	dev/dk-rpm	10,0 – 12,0	10,0 – 12,0	10,0 – 12,0
WEIGHT	ton			




BANT KONVEYÖR
CONVEYOR BELT








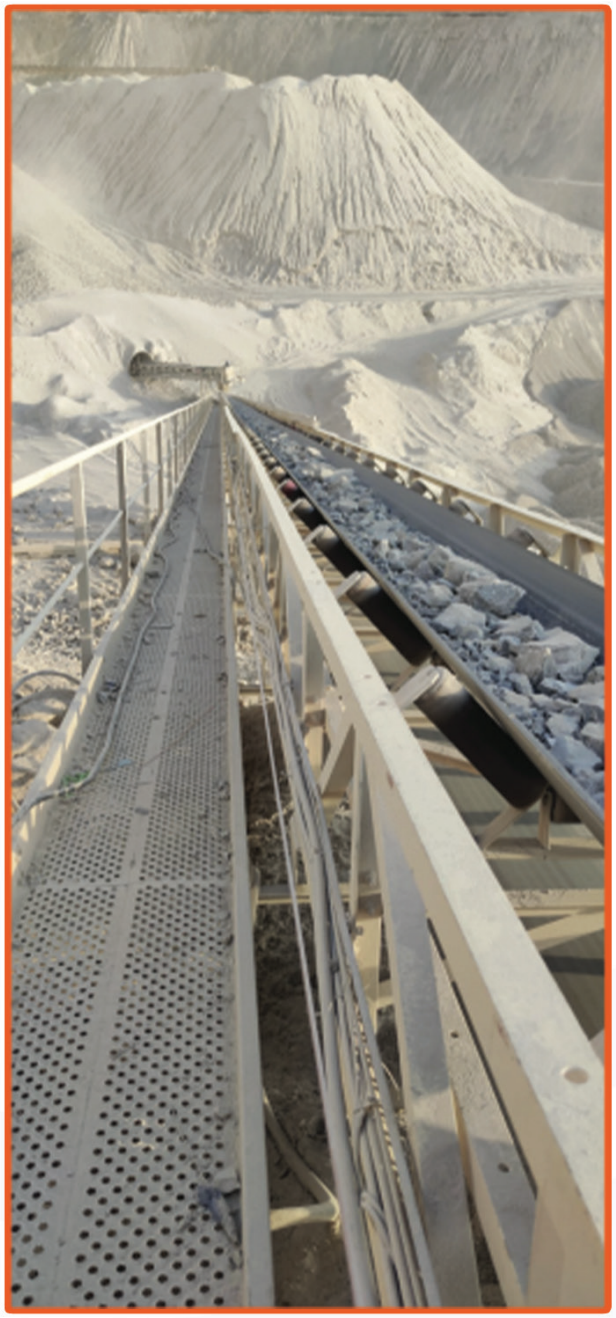

DİK MİLLİ KAPALI ROTOR YEDEK PARÇA

SPARE PART OF VERTICAL SHAFT CRUSHES

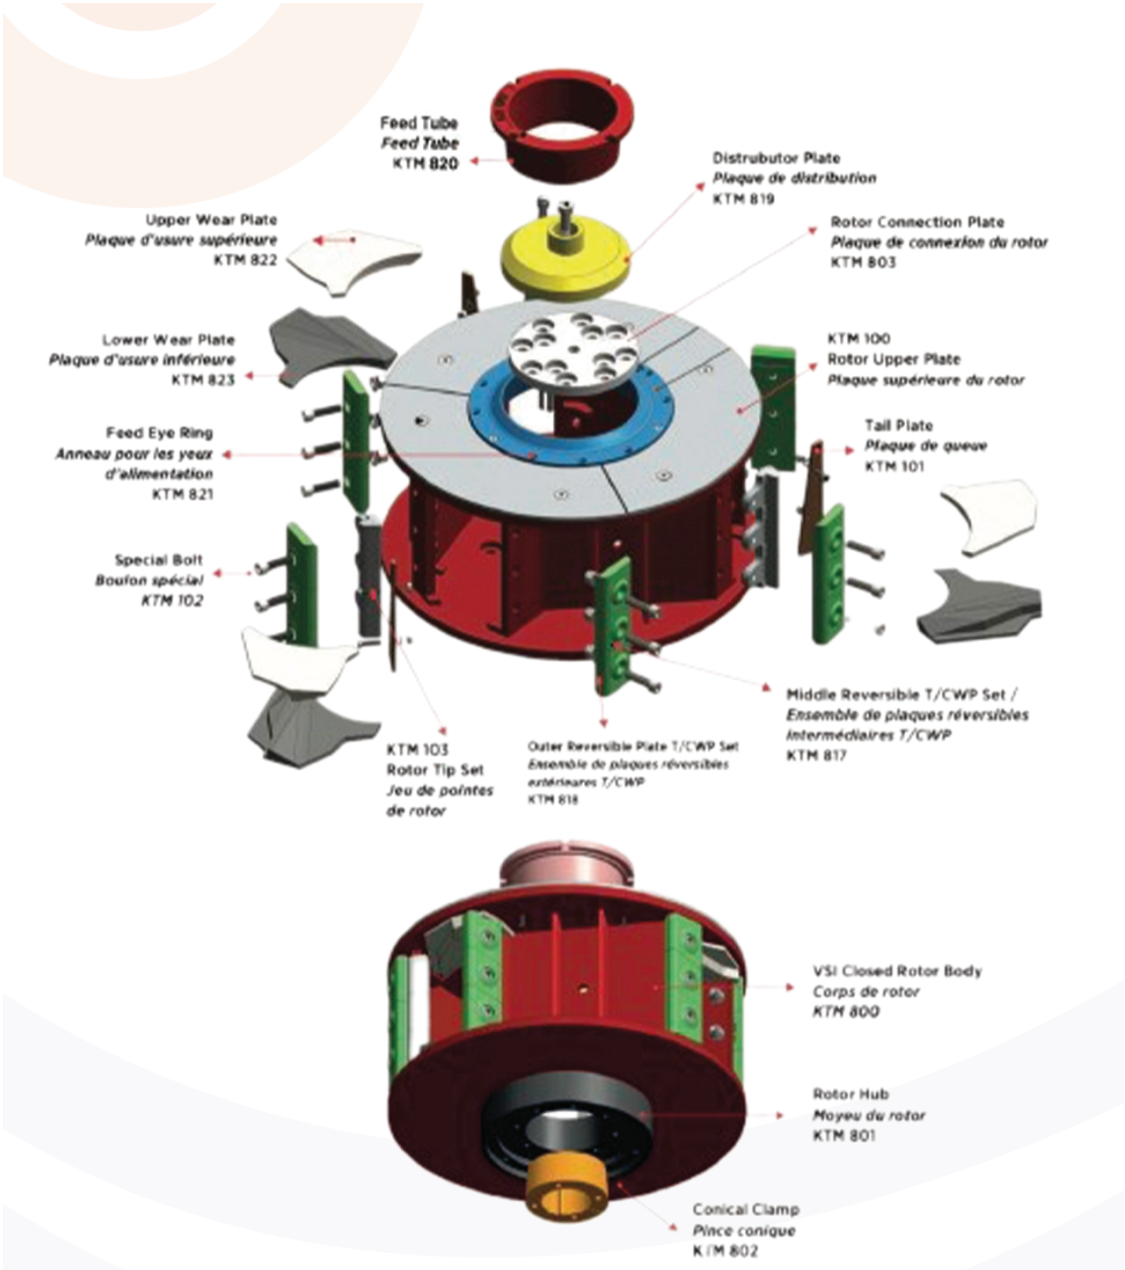

DİK MİLLİ KAPALI ROTOR YEDEK PARÇA 2

SPARE PART OF VERTICAL SHAFT CRUSHES 2



KTM 817
Middle Reversible Plate T/CWP Set/*Middle Wear Plate*
Ensemble de plaques réversibles intermédiaires T/CWP

KTM 818
Outer Reversible Plate T/CWP Set
Outer Wear Plate
Ensemble de plaques réversibles extérieures T/CWP

KTM 819
Distributor Plate
Plaque de distribution

KTM 820
Feeding Tube
Tube d'alimentation

KTM 821
Feed Eye Ring
Anneau pour les yeux d'alimentation

KTM 822
Upper Wear Plate
Plaque d'usure supérieure

KTM 823
Lower Wear Plate
Plaque d'usure inférieure

KTM 100
Rotor Upper Plate
Plaque supérieure du rotor

KTM 803
Rotor Connection Plate
Plaque de connexion du rotor

KTM 801
Rotor Hub
Moyeu du rotor

KTM 802
Conical Clamp
Pince conique

KTM 800
Rotor Body
Corps de rotor

KTM 103
Rotor Tip Set
Jeu de pointes de rotor

Backup Tipset
Backup Tipset

KTM 102
Special Bolt
Boulon spécial

Swing Bold
Swing Bold

Rotor Tip
Rotor Tip

KTM 101
Tail Plate
Plaque de queue

YEDEK PARÇA
SPARE PARTS

Yedek parçanın tesis için önemini biliyor ve 7 / 24 parça tedarik hizmeti veriyoruz. İletişim için lütfen **info@klcmakina.com**'a mail atınız veya **www.klcmakina.com** 'u ziyaret ediniz.


We know the importance of spare parts for the facility and we provide 24/7 parts supply service. Contact us via e-mail to **info@klcmakina.com** or visit **www.klcmakina.com**


Crusher Rotor



Crusher Blowbar


Washer Auger Rear Bearings


Conveyor Belt



Mesh Tension Bolt


Conveyor Drums


Conveyor Belt Rollers


Sieve Spring


Conveyo Belt Gear Box


Band Tire Clamp


Conveyor Belt Magnet










PROJE
PROJECT

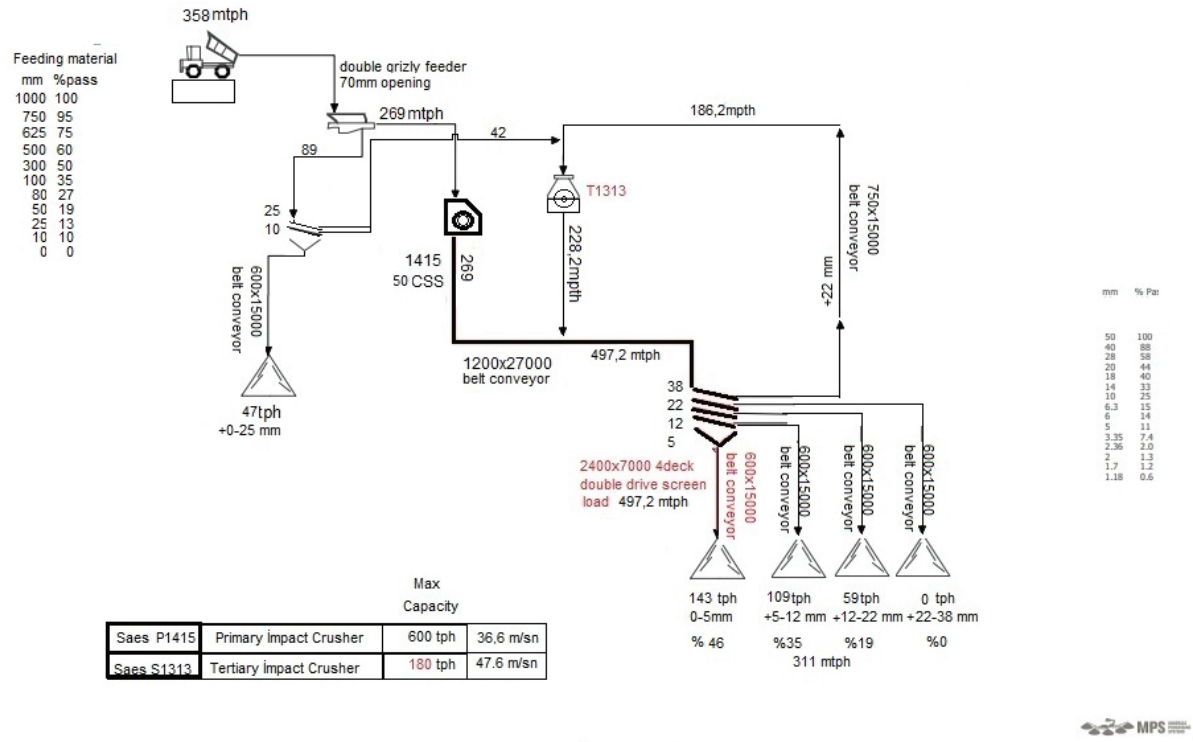

		Max Capacity	
Saes P1415	Primary İmpact Crusher	600 tph	36,6 m/sn
Saes S1313	Tertiary İmpact Crusher	180 tph	47.6 m/sn

mm	% Pas
50	100
40	88
28	58
20	44
18	40
14	33
10	25
6.3	15
6	14
5	11
3.35	7.4
2.36	2.0
2	1.3
1.7	1.2
1.18	0.6

MPS

Calculation results may differ due to variations in operating conditions and application of crushing and screening equipment. This information does not constitute an express or implied warranty, but shows results of calculations based on information provided by customers or equipment manufacturers. Use this information for estimating purposes only.

All calculations performed by AggFlow. http://www.AggFlow.com

Veta Mermer Tic A.Ş

Plant Stage #1:
Project #: 12424 Revision #: 004598 Date: 13/08/2023

KALAYCIOĞLU

KLC MAKİNA



www.klcmakina.com +90 (312) 394 74 25 info@klcmakina.com